
-

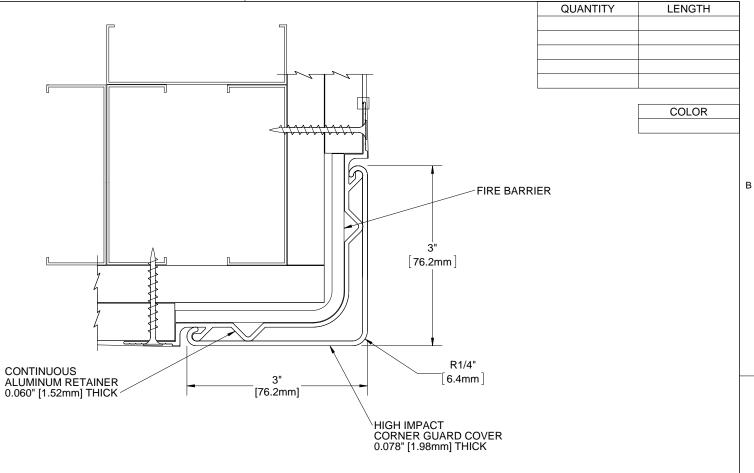

NOTES:

- PROFILE: HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK
- 2. CLASS A FIRE RATING, 2 HOUR, TESTED TO ASTM E84
- 3. RETAINER: CONTINUOUS 6063 T-5 ALUMINUM, NOMINAL 0.060" (1.52mm) THICK
- 4. **EXTRUSION**: PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- 5. MAXIMUM LENGTH: VINYL CORNER GUARDS 20'
- 6. HARDWARE: #6 X 1-5/8" DRYWALL SCREWS INCLUDED
- 7. 6063-T5 ALUMINUM COVE BASE INCLUDED, 4" STANDARD HEIGHT
- 8. PARTITION COMPONENTS PROVIDED BY OTHERS. FINISHED LENGTH INCLUDES COVE BASE.

PROJECT: ARCHITECT: CONTRACTOR: TITLE: **babcock**davis 3" VINYL CORNER GUARD RECESS MOUNT 2 HOUR FIRE BARRIER 9300 73rd Avenue North Brooklyn Park, MN 55428 NAME DATE SIZE DWG. NO. REV BCGVF3S Α MDS 24APR13 A DRAWN RELEASED PGE 01MAY13 WEIGHT: 1.58 lbs/ft SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

2

1