


# Existing Opening

## FLOOR DOOR, 300PSF

The redesigned Existing Opening Floor Door is designed for retrofit applications and is constructed with an angle frame. While providing a quality, economical option this is ideal for areas where water or moisture intrusion is not a concern.

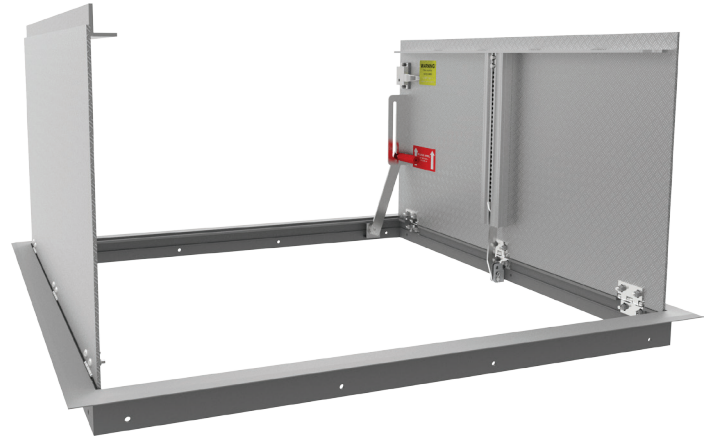

### FEATURES

**PEDESTRIAN LOAD** Designed for standard duty loads and tested up to 300psf live load in interior areas.

**MATERIAL OPTIONS** Upgrade the material to steel for added strength and durability or stainless steel for areas where corrosion is a concern.

### DETAILS

**LOAD** 300 psf live load

**MATERIAL** Aluminum: 1/4 inch, mill finish with gray primer on exterior frame

**COVER** Diamond tread plate

**FRAME** Angle

**INSTALLATION** Bolt-in

**SPRING** Enclosed coil, Type 17-7 Stainless Steel

**HINGES** Heavy-duty Type 316 Stainless Steel

**HOLD OPEN ARM** Type 316 Stainless Steel, automatic, locks cover in open position

**LATCH** Slam latch, Type 316 Stainless Steel, with inside lever handle, includes removable threaded plug and key


**GASKET** Gasket around frame perimeter

### MATERIALS



Aluminum

### INSTALLATION



Bolt-in

### ORDER GUIDE

MODEL	WIDTH	X	LENGTH	COVER	FL	-	OPTIONS
BFDEPA		X					
	Standard Sizes (W x L)						
	Single Leaf		Double Leaf	S Single Door			Locks Finishes Operation Safety Skirting Other
	24" x 24"		48" x 48"	D Double Door			
	30" x 36"		48" x 72"				
	36" x 36"		60" x 60"				
	42" x 42"						

Additional sizes available, call for more information.