

# Drainable


## FLOOR DOOR, 300PSF

Babcock-Davis' newly designed Drainable Floor Door is intended for standard-duty exterior or high moisture areas where liquid flow is required. The frame is constructed with a gutter channel for runoff into a drainage system and includes an odor tight gasket.

### FEATURES

**LARGEST CLEAR OPENING** The components are engineered with a maximum clear opening.

**LIGHTER WEIGHT** The streamlined design utilizes the spring housing as a door stiffener, resulting in lighter covers.

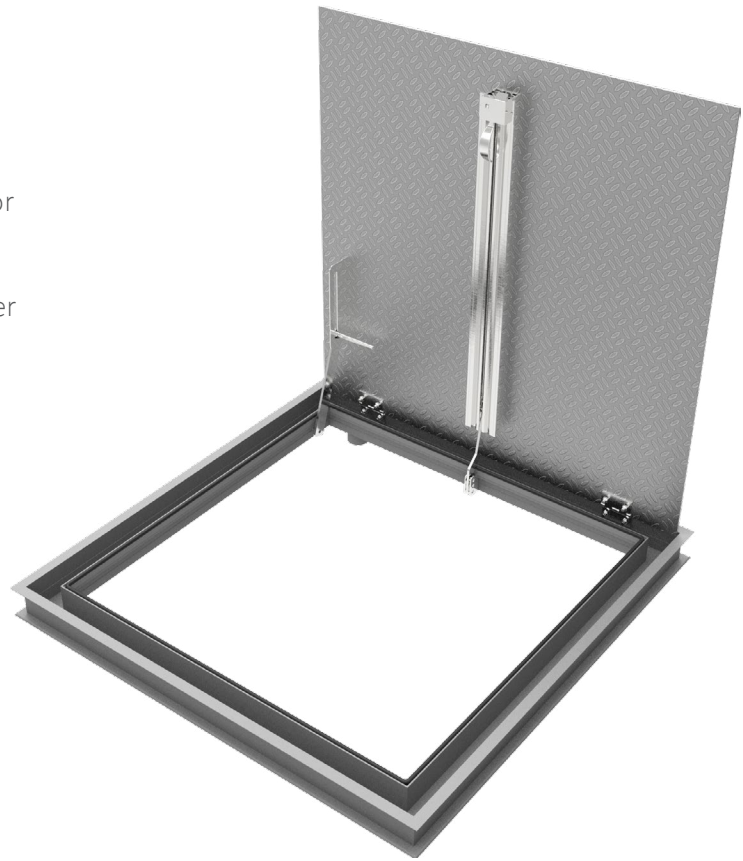

### DETAILS

**LOAD** 300 psf live load

**MATERIAL** Aluminum: 1/4 inch, mill finish with gray primer on exterior frame

**COVER** Diamond tread plate

**FRAME** Drainable gutter frame with integral 1 inch anchor flange, EDPM airtight gasket and 1-1/2 inch drain coupling

### INSTALLATION

- Cast In
- Bolt-In

**SPRING** Enclosed coil, Type 17-7 Stainless Steel


**HINGES** Heavy duty Type 316 Stainless Steel

**HOLD OPEN ARM** Type 316 Stainless Steel automatic hold open arm locks cover in open position

**LATCH** Slam latch Type 316 Stainless Steel with inside lever handle, includes removable threaded plug and key


**OPTIONS** Padlock Hasps, Locks, Finishes, Safety Grates, Safety Nets, Safety Rails, Skirting

### MATERIALS



Aluminum

### INSTALLATION



Cast-in

### ORDER GUIDE

MODEL	MATERIAL	WIDTH	X	LENGTH	COVER
<b>BFDDP</b>			<b>X</b>		<b>FL</b>
	<b>A</b> 1/4" Aluminum	<b>Standard Sizes (W x L)</b>			<b>S</b> Single Door <b>D</b> Double Door
		Single Door	Double Door		
		24" x 24"	48" x 48"		
		30" x 36"	48" x 72"		
		36" x 36"	60" x 60"		
		42" x 42"			
		48" x 48"			