

SPECIFICATIONS:

Α

в

(D) COVER: 14GA (.079)GALV STEEL, STIFFENED TO WITHSTAND A LIVE LOAD OF 40PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN.

- 2 CURB: 14GA (.079)GALV STEEL CURB COUNTERFLASH WITH EZ TABS.
- 3 FINISH: RED POWDER COAT

(A) INSULATION: 1" POLYISO R-6 (5.6 LTTR)IN CURB,

1" POLYSTYRENE R-4 (3.8 LTTR)IN COVER.

GASKET: EXTRUDED EPDM RUBBER ADHESIVE BACKED GASKET SEAL COUNTINUOUS AROUND COVER.

SPRING: GAS SPRING WITH DAMPER FOR SMOOTH, CONTROLLED, COUNTERBALANCED LIFT ASSISTANCE.

D **HINGE:** PINTLE HINGE WITH STAINLESS STEEL HINGE PINS.

HOLD OPEN ARM: ZINC PLATED STEEL AUTOMATIC HOLD OPEN ARM LOCKS
KO
COVER IN FULLY OPEN POSITION WITH RED POLYPROPYLENE GRIP HANDLE PULL RELEASE.

(2) LATCH: ZINC PLATED STEEL SLAM LATCH, HOLDS COVER CLOSED AGAINST 20PSF WIND UPLIFT, INTERIOR AND EXTERIOR TURN HANDLES WITH PADLOCK HASPS.

 \triangleleft

ECTION

 $\langle 4 \rangle$

15 7/8'

DWDER COAT

NOTES:

-WHEN INSTALLING ON A PITCHED ROOF UP TO 7:12, THE HINGE SIDE(LENGTH)MUST BE PARALLEL TO THE SLOPE. - WIDTH X LENGTH DIMENSIONS ARE MEASURED INSIDE CURB TO INSIDE CURB. THE WIDTH IS HINGE TO LATCH AND LENGTH IS HINGED SIDE.


ROOF HATCH SIZE 36" (WIDTH) x 36" (LENGTH) CLEAR OPENING 28 1/8" (WIDTH) x 35 1/2" (LENGTH) ROUGH OPENING 36" (WIDTH) x 36" (LENGTH)

PROJECT:						
ARCHITECT:						
CONTRACTOR:						
QTY:						
PART:				BG3636		
babcock davis 9300 73rd Avenue North Brooklyn Park, MN 55428				TITLE: BRHUG36X36S1T Roof Hatch Personnel II, 36x36, S Dr, Galvn Steel, Red Pwd, Sngl Wall Curb		
	NAME	DATE	SIZE	DWG. NO.		REV
DRAWN	SGS	04/01/15	А	BG3636		-
RELEASED	IMT	04/01/15	WE	IGHT: 141 lbs	SHEET 1	OF 2

А

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

2

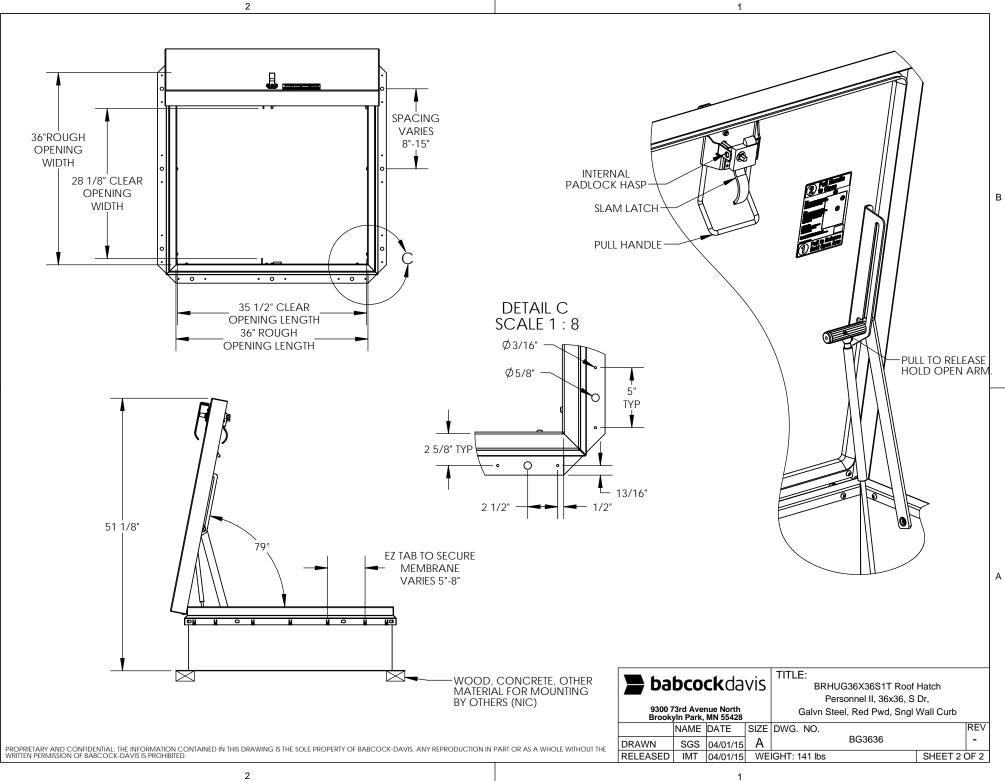

2

В

А