


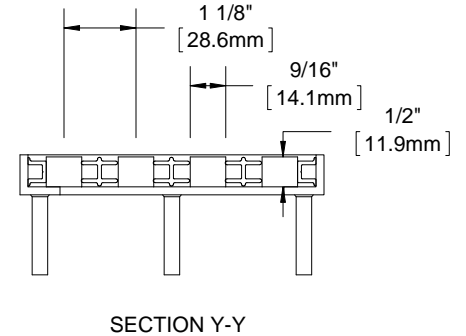


BGV120



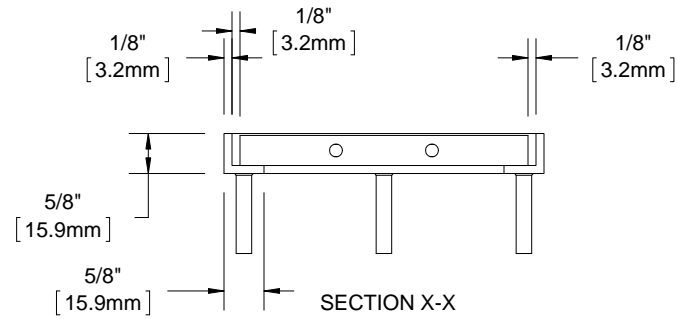


BGV120O

QTY	MODEL	WIDTH	LENGTH	FINISH	LOCATION

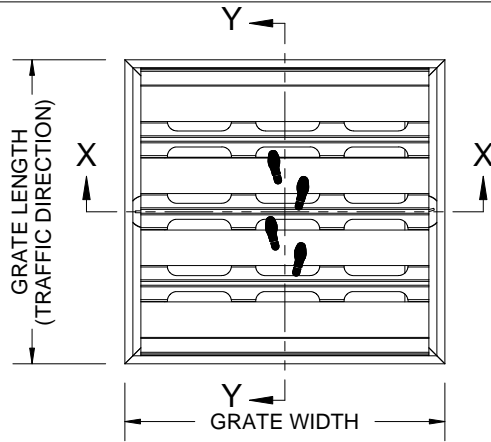

SINGLE TREAD

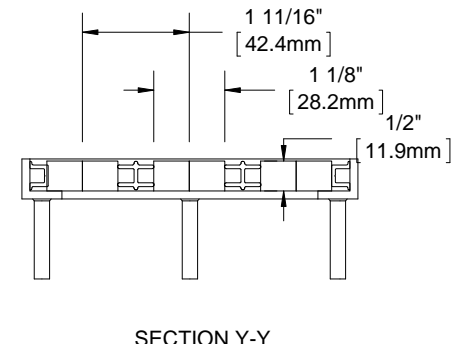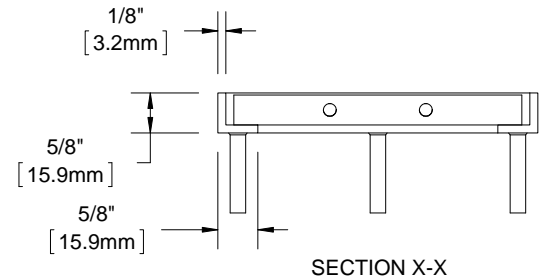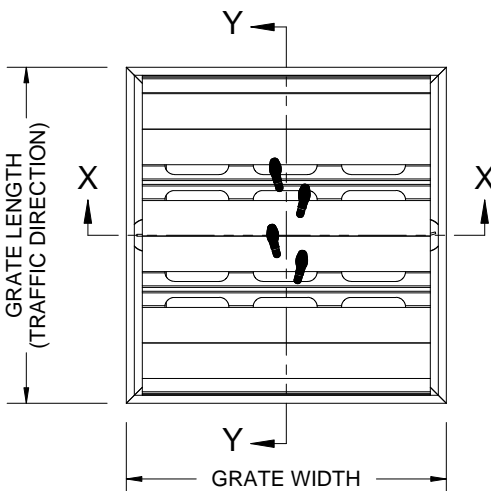

DOUBLE TREAD

- NOTES:**
- STANDARD MAXIMUM SECTION SIZE OF GRATE WIDTH NOT TO EXCEED 10'-0"
  - FRAME ANCHOR SPACING: 6" FROM CORNERS, 24" MAX
  - VERIFY TRAFFIC DIRECTION
  - ALL RAIL COMPONENTS ARE MADE OF 6063-T6 ALUMINUM ALLOY, ALL FRAME COMPONENTS ARE MADE OF 6063-T5 ALUMINUM ALLOY
  - TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION
  - GRATE DIMENSION ALLOWS FOR CLEARANCE BETWEEN GRATE SECTIONS AND FRAMES IN THE WIDTH DIMENSION
  - ADDITIONAL INFORMATION CAN BE FOUND IN THE PRODUCT SPECIFICATION AND IS CONSIDERED PART OF THIS TRANSMITTAL.
  - FRAME MODEL NUMBER: BFV12LBM

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
		DESCRIPTION:	
		envIRONtread II®, 15/32", Perforated Rail, Reversible Recycled Rubber Grate with Mechanically Fastened Aluminum Frame	
9300 73rd Avenue North Brooklyn Park, MN 55428		NAME	DATE
DRAWN	DKL	4/17/15	SIZE
RELEASED	PE	4/17/15	A
DWG. NO.			
BGV120-FLBM			
SCALE: NTS			
SHEET 1 OF 1			
REV B			

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.