


Fire-Rated 1/8 Inch Pan

ARCHITECTURAL FLOOR DOOR

Babcock-Davis' Fire-Rated Floor Door is designed to contain a fire from penetrating through the opening. This floor door is reinforced for pedestrian traffic loads and features a pan that accepts carpet or vinyl tile. Interior applications only.

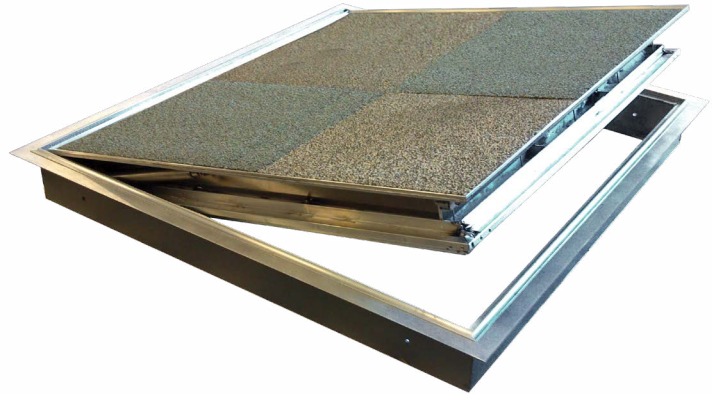

FEATURES

MINIMAL SIGHT LINE The recessed design allows for 1/8 VCT flooring infill to seamlessly integrate with the surrounding area.

FIRE-RATED Tested to NFPA 288, this floor door is Warnock-Hersey labeled with 2- or 3-hour fire-rating with a maximum temperature rise to 250°F.



DETAILS

LOAD 300 psf live load

MATERIAL Aluminum: 1/4 inch, mill finish, gray primer on exterior frame (for cast-in only)

COVER 1/8 inch pan recess for carpet or tile

FIRE-RATING 2- or 3-Hour

FRAME Extruded Aluminum Angle

INSTALLATION Cast In or Bolt-In

SPRING Gas spring, Type 316 Stainless Steel

HINGES Heavy-duty Type 316 Stainless Steel butt hinge

LATCH Two-point slam latch, zinc plated steel, with inside pull release cable, includes removable 5/16 inch steel square "L" handle and threaded plug

COMPLIANCE NFPA 288


OPTIONS Self-closing mechanism automatically closes door at 165°F in event of fire, dampers for slow opening

MATERIALS




Aluminum

FRAME



Angle Frame
Cast-In



Angle Frame
Bolt-In

ORDER GUIDE

BASE	RATING	WIDTH	LENGTH	OPTIONS
BFT				
	RM 2-Hour	Standard Sizes (W x L) Single Leaf 24" x 24" 36" x 36" 30" x 30" 42" x 42" 30" x 36" 48" x 60"		SC Self-Closing Mechanism
	CM 3-Hour			W Wood Frame Install

Additional sizes available, call for more information.