

Stainless Steel

WALL COVERING

Babcock-Davis' Architectural Stainless Steel Wall Covering can be used in a wide variety of applications. This sturdy wall covering is available in various thicknesses and 10 embossed patterns, or a classy satin finish. These metal sheets can be added to walls, doors, and cabinetry in virtually any facility.



DETAILS

MATERIAL 16 Gauge Type 304 Stainless Steel

FINISH #4 Satin or Embossed

MOUNTING Surface

MOUNTING METHOD Mechanical

SIZE

- 4 feet by 8 feet
- 4 feet by 10 feet


ORDER GUIDE

MODEL	THICKNESS	SIZE	OPTIONS
BWCS			-
	16 16 gauge	S4X8 4" x 8" Sheet	DHS Drilled Holes & Hardware
	18 18 gauge	S4X10 4' x 10' Sheet	DHC Countersunk Holes & Hardware
	14 14 gauge		

Vinyl

WALL COVERING

Babcock-Davis' Vinyl Wall Covering can be used in a wide variety of applications. This sturdy wall covering is available various thicknesses and 70 color options with a classic Textured pattern.

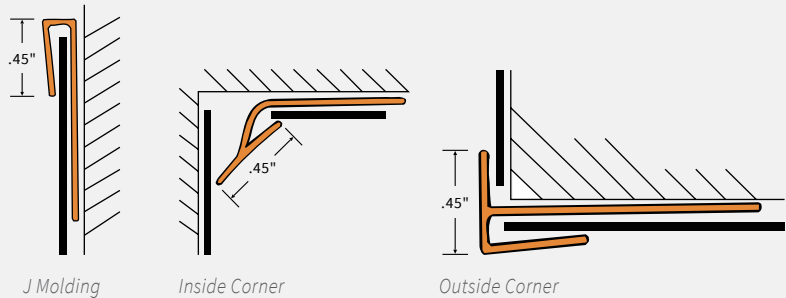

J Molding

Inside Corner

Outside Corner

DETAILS

MATERIAL Vinyl

FINISH Textured


MOUNTING Surface

MOUNTING METHOD Adhesive

SIZE

- 4 feet by 8 feet
- 4 feet by 10 feet

MATERIAL



Vinyl

ORDER GUIDE

MODEL	THICKNESS	SIZE	ACCESSORIES
BWCV			-
	030 .030" [†]	Sheet	Trim Molding
	040 .040" [†]	S4X8 4" x 8" Sheet	MJM1 J-Molding
	060 .060"	S4X10 4' x 10' Sheet	MIC1 Inside Corner Molding
	080 .080"	Roll	MOC1 Outside Corner Molding
	090 .090"	R2X120 2' x 120"	MDB1 Divider Bar - .028" and .04" thickness only
	125 .125" [‡]	R3X120 3' x 120"	CMC Color Match Caulk
		R4X120 4' x 120"	HPROLLER Heavy Pressure Roller
			Adhesives
			ADF1 #M Fastbond Contact Cement (1 Gallon)
			ADF5 #M Fastbond Contact Cement (5 Gallon)
			ADM1 Super Tek XT-2000 Mastic (1 Gallon)
			ADMS Super Tek XT-2000 Mastic (5 Gallon)
			ADSL Spray Lock Adhesive (22 oz Can)
			Substrate Sealer
			DS1 Dry-Seal Substrate Sealer (1 Gallon)
			DS55 Dry-Seal Substrate Sealer (5 Gallon)

[†] Roll only available on .030 inch and .040 inch thick sheets.

[‡] .125 inch thick sheet is unrated.