

SPECIFICATIONS:

1 DOOR: 20 Ga Steel

2 FRAME: 16 Ga Steel, 1.25" Flange

3 FINISH: White Pwd

4 HINGE: Concealed Pin Hinge


5 LATCH:

6 INSULATION: 1.5" Fiberglass Insulation for

Sound Attenuation

ROUGH OPENING: CLEAR OPENING:

DEGREE OF OPENING: 120°

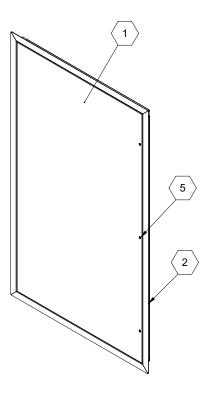

OPTIONS

Gasketing Installed

Perforated Door,

in² Free Area

Door Liner, 20 Ga Steel

Ceiling Mount

PROJECT:						
ARCHITECT:						
CONTRACTOR:						
QTY:						
PART#:						
babcock davis*				TITLE:		
9300 73rd Avenue North, Minneapolis, MN 55428						
	NAME	DATE	SIZE	DWG. NO.		RE'
DRAWN			Α	Babcock AD HVACT ShpDr		
RELEASED	LEASED WEI		WE	IGHT:	SHEET 1	OF 2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED. ©2021 BABCOCK-DAVIS

SECTION A-A

