


SECTION B-B

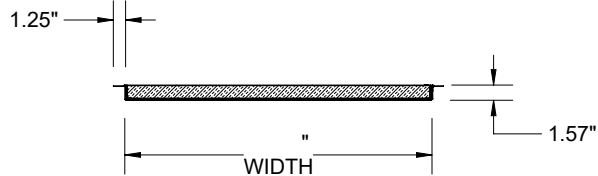


SECTION A-A

SPECIFICATIONS:

- ① **DOOR:** 20 Ga Steel
- ② **FRAME:** 16 Ga Steel, Drywall Bead
- ③ **FINISH:** White Powder Primer Coat
- ④ **HINGE:** Concealed Pin Hinge
- ⑤ **LATCH:**
- ⑥ **INSULATION:** 1.5" Fiberglass Insulation for Sound Attenuation

ROUGH OPENING:
CLEAR OPENING:
DEGREE OF OPENING: 120°



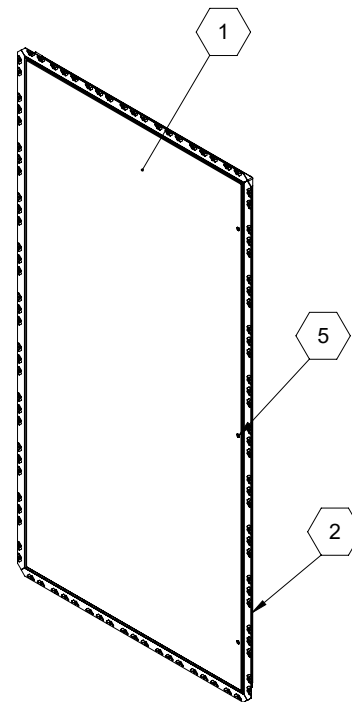


OPTIONS

- Gasketing Installed
- Perforated Door, in² Free Area
- Door Liner, 20 Ga Steel
- Ceiling Mount


PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:		TITLE:	
		9300 73rd Avenue North, Minneapolis, MN 55428	
NAME	DATE	SIZE	DWG. NO.
DRAWN		A	Babcock AD BHVACW ShpDr
RELEASED		WEIGHT:	REV
			SHEET 1 OF 2

B

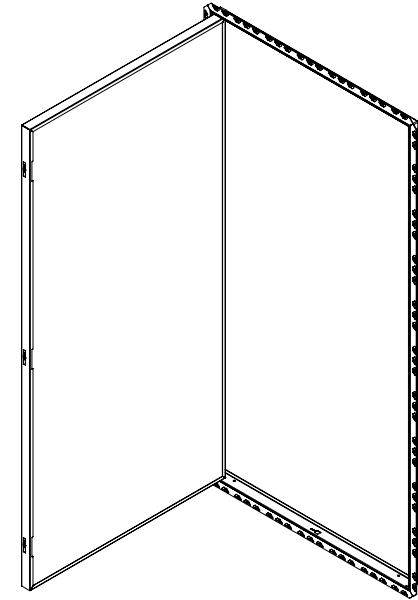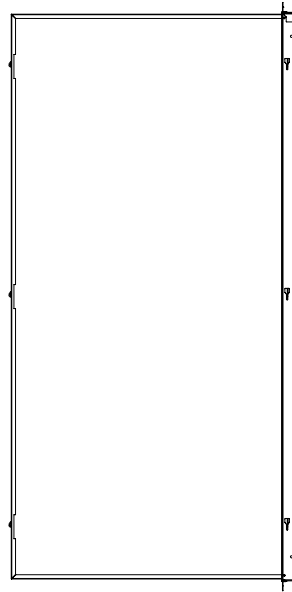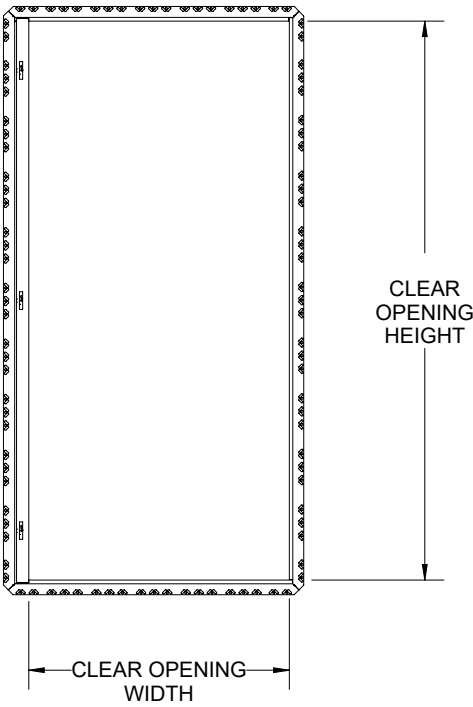


B

A



A

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED. ©2021 BABCOCK-DAVIS

PART#:			TITLE:		
 9300 73rd Avenue North, Minneapolis, MN 55428					
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN			A	Babcock AD BHVACW Shp Dr	
RELEASED			WEIGHT:	SHEET 2 OF 2	