


Fire Extinguishers

PRINCIPLES OF SELECTING EXTINGUISHERS:

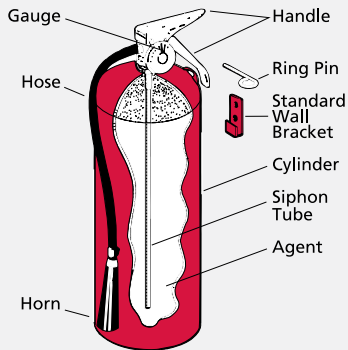

TYPICAL STORED-PRESSURE FIRE EXTINGUISHER

- Type of potential fire hazard.
- Severity of potential fire hazard.
- Environmental conditions of potential fire hazard.
- Effectiveness of extinguisher on potential fire hazard.
- Training and physical capabilities of available personnel to operate extinguisher.
- Upkeep and maintenance requirements of extinguisher.

For further information, refer to NFPA 10.

FIRE CLASSIFICATIONS				
TYPE OF FIRE	Wood, paper, cloth, trash & other ordinary combustibles	Flammable liquids	Energized electric equipment	Cooking appliances w/ combustible cooking media
CLASS AND LETTER SYMBOL	A	B	C	K
PICTURE SYMBOL				
AGENTS				
MULTI-PURPOSE DRY CHEMICAL	Yes	Yes	Yes	No
KITCHEN	Yes	No	No	Yes
WATER	Yes	No	No	No
FFFP	Yes	Yes	No	No
BC DRY CHEMICAL	No	Yes	Yes	No
CARBON DIOXIDE	No	Yes	Yes	No
HALOTRON 1	Yes	Yes	Yes	No

ABC Dry Chemical FIRE EXTINGUISHERS



The ABC Multi-Purpose Dry Chemical fire extinguisher is used to provide protection against Class A, B and C fires.

FINISH Glossy red polyester coated

MOUNTING Wall bracket

DISCHARGE Nozzle or hose

AGENT BASE Ammonium Phosphate

PRESSURE 195 P.S.I.

MOUNTING BRACKET

MODEL	NOMINAL CAPACITY	UL RATING	HEIGHT	CYLINDER DIAMETER	RANGE OF STREAM	TYPE DISCHARGE
BEX-3002	2-1/2 Lbs.	1A:10B:C	14-3/4"	3"	9' - 15'	Nozzle
BEX-3005	5 Lbs.	2A:10B:C	15-1/4"	4-1/4"	12' - 18'	Hose
BEX-3005-3	5 Lbs.	3A:40B:C	15-1/4"	4-1/4"	12' - 18'	Hose
BEX-3006	6 Lbs.	3A:40B:C	16"	5"	15' - 21'	Hose
BEX-3010	10 Lbs.	4A:80B:C	20"	5"	15' - 21'	Hose
BEX-3020	20 Lbs.	20A:120B:C	23-1/4"	7"	15' - 21'	Hose

MODEL	FITS SIZE
BEX-3901	5 Lbs.
BEX-3902	6 Lbs.
BEX-3903	10 Lbs.
BEX-3904	20 Lbs.
BEX-3909	5, 6, 10 Lbs.
BEX-3910	20 Lbs.

Kitchen Class K FIRE EXTINGUISHERS



The Kitchen Class K portable fire extinguishers discharge a fine mist and help prevent grease splash and re-flash while cooling appliances. These wet chemical extinguishers are the best restaurant kitchen appliance portable fire extinguishers available and provide protection against Class K fires.

FINISH Stainless Steel

MOUNTING Wall bracket

DISCHARGE Hose

AGENT Potassium Acetate Solution

MOUNTING BRACKET

MODEL	NOMINAL CAPACITY	UL RATING	HEIGHT	CYLINDER DIAMETER	RANGE OF STREAM	TYPE DISCHARGE
BEX-3260	6 ltr.	2A:K	19"	7"	10' - 12'	Hose
BEX-3262	2-1/2 gal.	2A:K	24-1/2"	7"	10' - 12'	Hose

MODEL	FITS SIZE
BEX-3904	2-1/2 gal.

*OPTION:
-AF Anti-freeze charge

Call for information on water mist "Clean Agent" and pressurized water/foam extinguishers.