
1

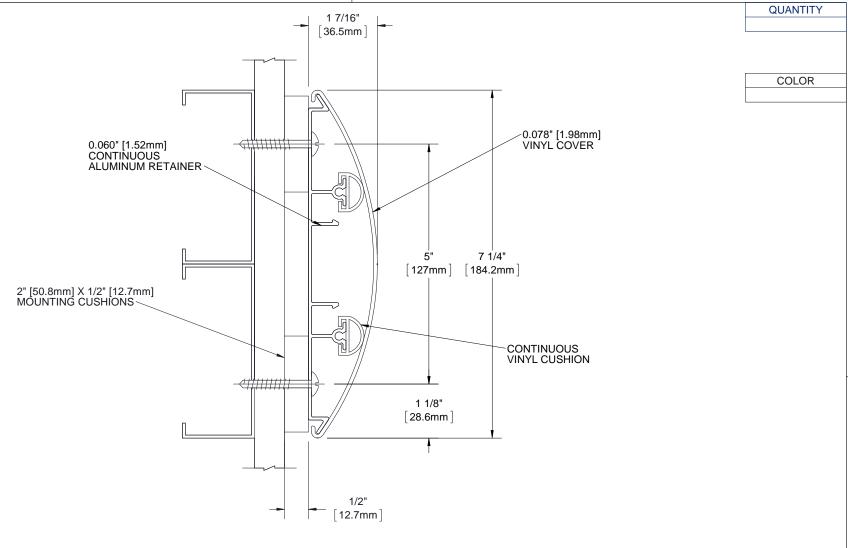

NOTES:

В

- PROFILE: HIGH IMPACT VINYL ACRYLIC EXTRUSION LOCKED IN PLACE, NOMINAL 0.078" (1.98mm) THICK
- 2. CLASS A FIRE RATING, TESTED TO ASTM E84
- 3. RETAINER: CONTINUOUS 6063 T-5 ALUMINUM RETAINER, NOMINAL 0.060" (1.52mm) THICK
- 4. **EXTRUSION**: PEBBLE GRAIN FINISH WHICH CONTAINS EPA REGISTERED MICRO-CHEK ANTIMICROBIAL AGENT
- 5. VINYL CRASH RAIL LENGTH: PROVIDED IN 20' CONTINUOUS SECTIONS
- 6. END CAP: #BCRVS7C-ECT, OUTSIDE CORNER: #BCRVS7C-OCT, 135 DEG OUTSIDE CORNER: #BCRVS7C-OC135, SPLICE KIT: #BCRVS7C-SK
- 7. FASTENERS AND PARTITION COMPONENTS PROVIDED BY OTHERS.

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

NT	PROJECT:							
	ARCHITECT:							
	CONTRACTOR:							
35,	babcock davis 9300 73rd Avenue North Brooklyn Park, MN 55428					E: 7" VINYL CRASH RAIL RESCENT SHAPE, SURFACE MOUNT " CUSHION, CONTINUOUS RETAINER		
		NAME		SIZE	DWG. NO.			REV
F	DRAWN	MDS	30MAY13	Α		BCRVS7C-C05		Α
-	RELEASED PGE 30MAY13 WEI			IGHT: 1.50 I	os/ft	SHEET 1	OF 1	

В