
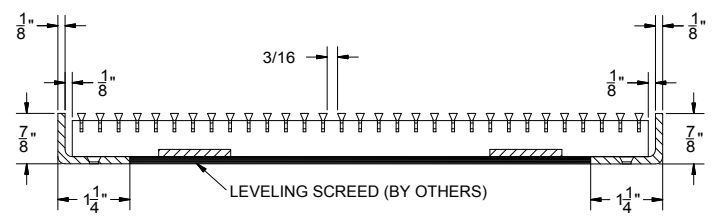


BGP34


QTY	MODEL	WIDTH	LENGTH	FINISH	LOCATION

B

B

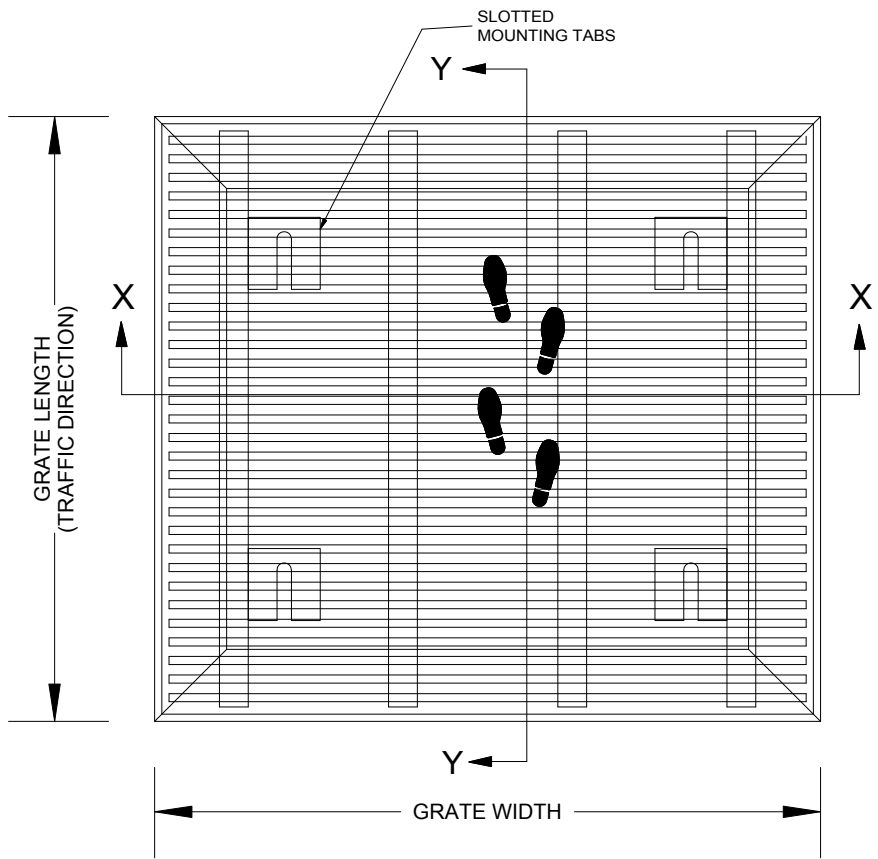

SECTION Y-Y

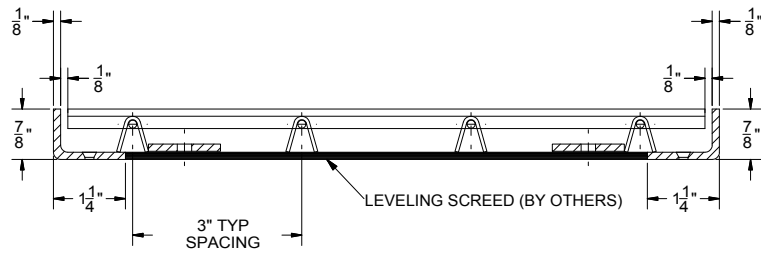

SECTION X-X

A

A

**NOTES:**

- FRAME ANCHOR SPACING: 6" FROM CORNERS, 24" MAX
- ALL RAIL COMPONENTS ARE MADE OF TYPE 304 STAINLESS STEEL, ALL FRAME COMPONENTS ARE MADE OF TYPE 304 STAINLESS STEEL.
- NON-WELDED MECHANICALLY INTERLOCKED CONSTRUCTION.
- GRATE IS MADE WITH .187 X .125" (3.6mm X 3.2mm) STAINLESS STEEL WIRE SPACED .1875 (4.8mm) O.C. AND WELDED SUPPORT RODS SPACED 3" (76.2mm) O.C.
- ADDITIONAL INFORMATION CAN BE FOUND IN THE PRODUCT SPECIFICATION AND IS CONSIDERED PART OF THIS TRANSMITTAL.
- FRAME PART NUMBER: BFP34LBM

PROJECT:				
ARCHITECT:				
CONTRACTOR:				
<p>9300 73rd Avenue North Brooklyn Park, MN 55428</p>			DESCRIPTION:	
			ProGril, 3/4", Stainless Steel, Grate with 1-1/4" x 1/8", Mechanically Fastened, Stainless Steel Frame	
NAME	DATE	SIZE		
DRAWN	DKL	7/24/14	A	
RELEASED	PE	7/24/14	SCALE: NTS	SHEET 1 OF 1
			REV A	

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.