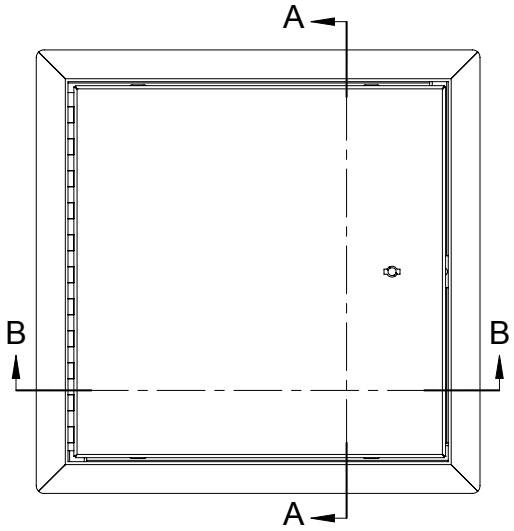

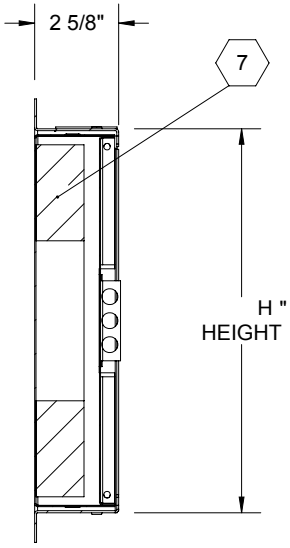

SECTION A-A

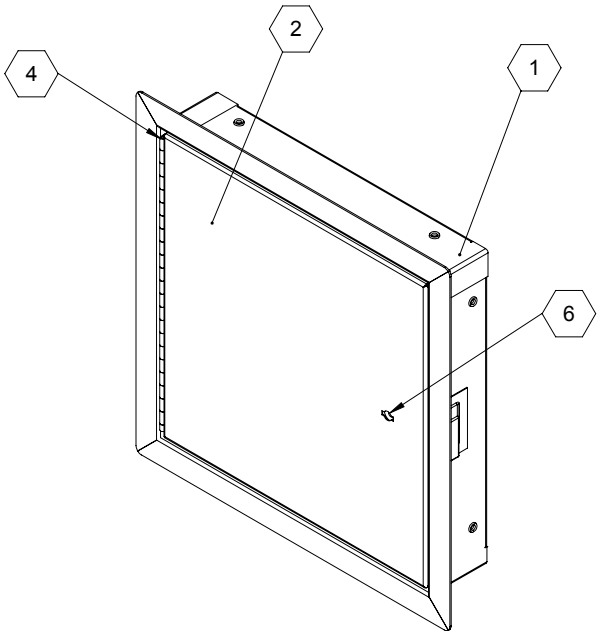

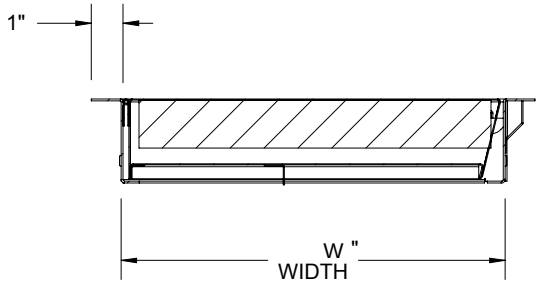

SECTION B-B

ROUGH OPENING: W + 0.25 " x H + 0.25 "
CLEAR OPENING: W - 3.25 " x H - 1.125 "
DEGREE OF OPENING: 120 °

HORIZONTAL
1 HR WOOD-FRAME CONSTRUCTION
3 HR NON-COMBUSTABLE CONSTRUCTION
ON SIZES UP TO AND INCLUDING 24" W X 36" H.

VERTICAL
1-1/2 HOUR "B" LABEL

C UL US
LISTED

NOTES:

1. **FRAME:** Cold Rolled Steel 16 ga
2. **DOOR:** Cold Rolled Steel, 20 ga
3. **FINISH:** White Powder Primer Coat
4. **HINGE:** Concealed Pin Hinge
5. **SECONDARY LATCH:** Varies
6. **LOCK:** Knurled Knob/Keyed Slam Latch
7. **INSULATION:** 2" Thick Fire Rated Mineral Wool, 8 R-Value

Options

- [ ] Drip Cap (C)
- [ ] Gasket Installed (G)
- [ ] Masonry Anchors (M)

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
QTY:					
PART#:				ITK__P	
babcockdavis® 9300 73rd Avenue North Brooklyn Park, MN 55428				TITLE: Access Door, Fire-Rated WxH, Insulated, CRS, Flush Dr, Exp Flg,	
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN			A	Babcock Davis AD BIT ShpDr	-
RELEASED			WEIGHT: VARIES		SHEET 1 OF 2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.

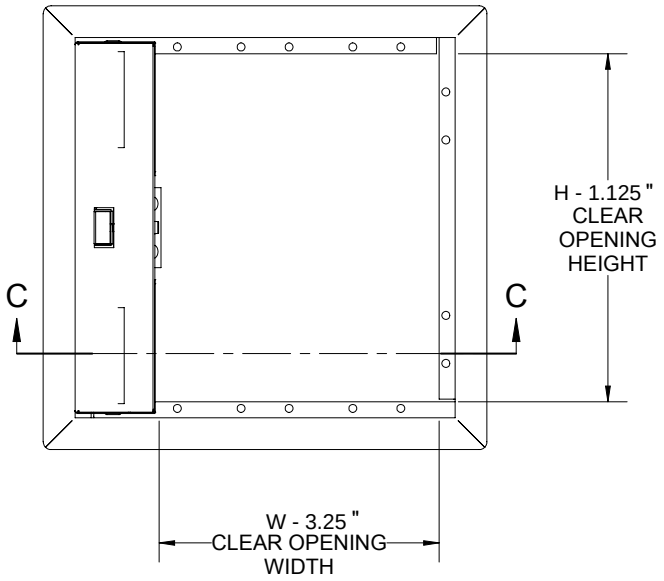

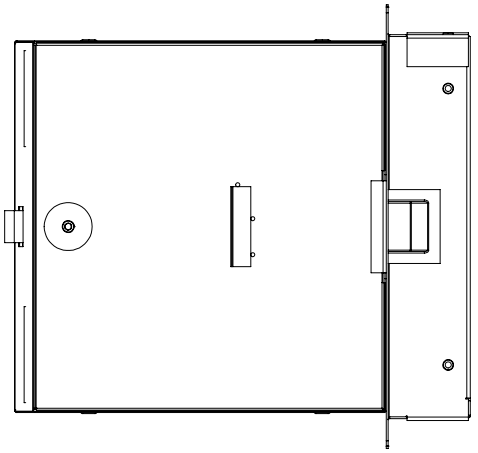

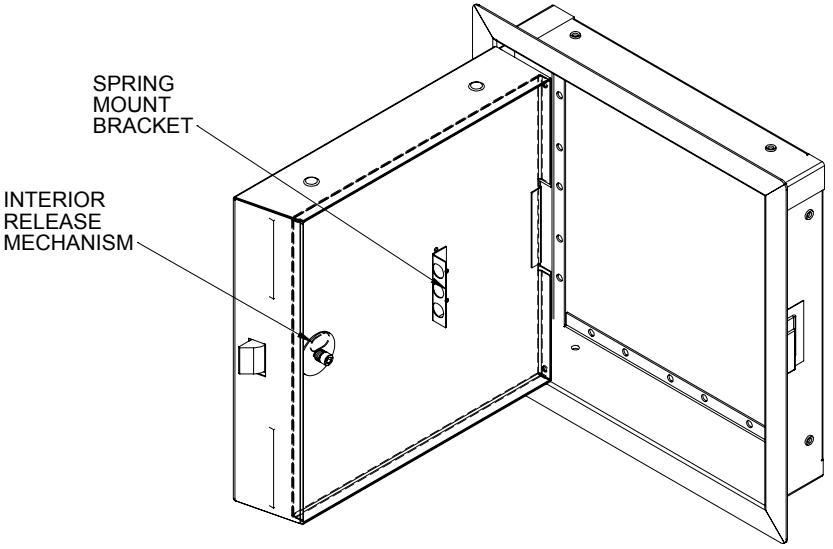

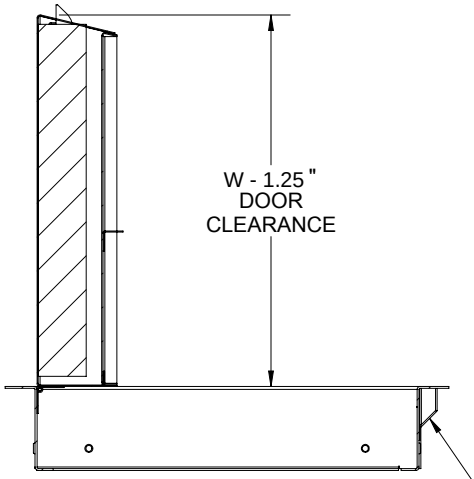

PART#:				ITK__P	
babcockdavis® 9300 73rd Avenue North Brooklyn Park, MN 55428				TITLE: Access Door, Fire-Rated WxH, Insulated, CRS, Flush Dr, Exp Flg,	
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN			A	Babcock Davis AD BIT ShpDr	-
RELEASED			WEIGHT: VARIES		SHEET 2 OF 2

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.