


PHOTOLUMINESCENT GRIT TAPE

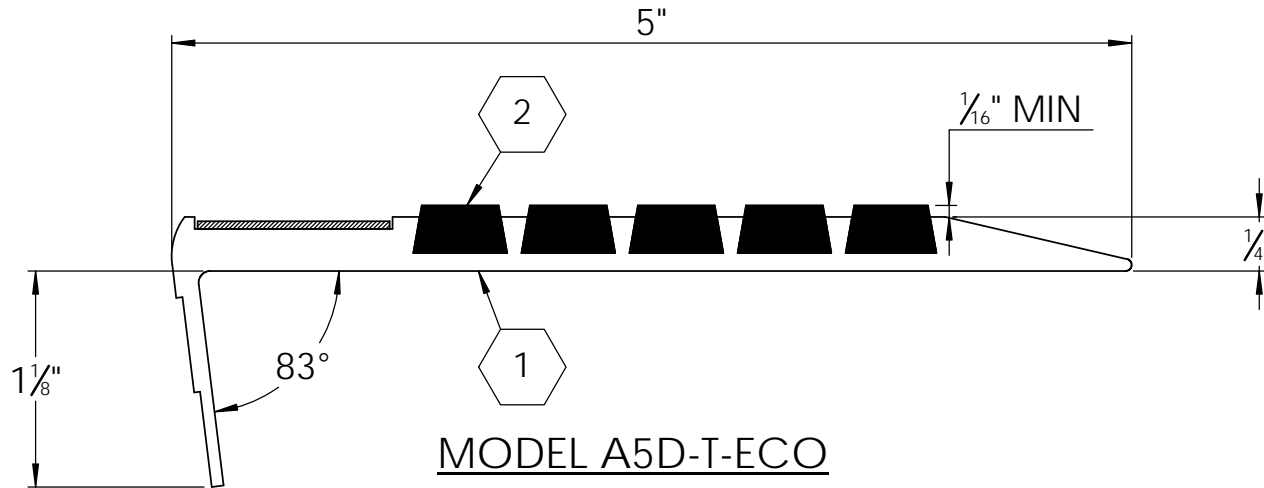

MODEL A5D-T-ECO
(RENOVATION ECO-TREAD RIBS)

SPECIFICATIONS:

- ① **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-5
- ② **ECOTREAD:** RECYCLED RUBBER SHEET
8MM RECYCLED RUBBER GRANULES
ENCAPSULATED IN A WEAR AND WATER
RESISTANT ELASTOMERIC NETWORK. 2 PARTS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL
TERMINATE NO MORE THEN 3" FROM END OF
STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING
SHALL BE FULL LENGTH OF STEPS, LESS 1/8"
CLEARANCE
- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW
- 7. **LENGTH:** 12'0" MAXIMUM
- 8. COUNTER SUNK HOLES PRE-DRILLED FOR A #10
FASTENER SPACED 3" FROM ENDS AND
APPROXIMATELY 12" TO 15" O.C.
- 9. UL 1994 LISTED: COMBINED WIDTH OF PHOTO-
LUMINESCENT MATERIAL SHALL NOT BE LESS
THAN 1"

| LENGTH | QTY | COLOR |
|--------|-----|-------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| | | | | | |
|---|-----|--|--------------|-----------------------------------|----------|
| PROJECT: | | | | | |
| ARCHITECT: | | | | | |
| CONTRACTOR: | | | | | |
| QTY: | | | | | |
| PART#: | | BSTRM-A5D-T-ECO | | | |
| 9300 73rd Avenue North Brooklyn Park, MN 55428 | | TITLE: Stair Tread, Renovation Alum. Bar Ribbed EcoTread Long Nose Angled, Drilled For Fastener 1" Photoluminescent Grit Insert, Black EcoTread Ribs | | | |
| | | NAME | DATE | SIZE | DWG. NO. |
| DRAWN | DKL | 5/22/20 | A | Babcock STN BSTRM-A5D-T-ECO ShpDr | A |
| RELEASED | TR | 5/22/20 | WEIGHT: 2 LB | SHEET 1 OF 1 | |

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.