


PHOTOLUMINESCENT INSERT

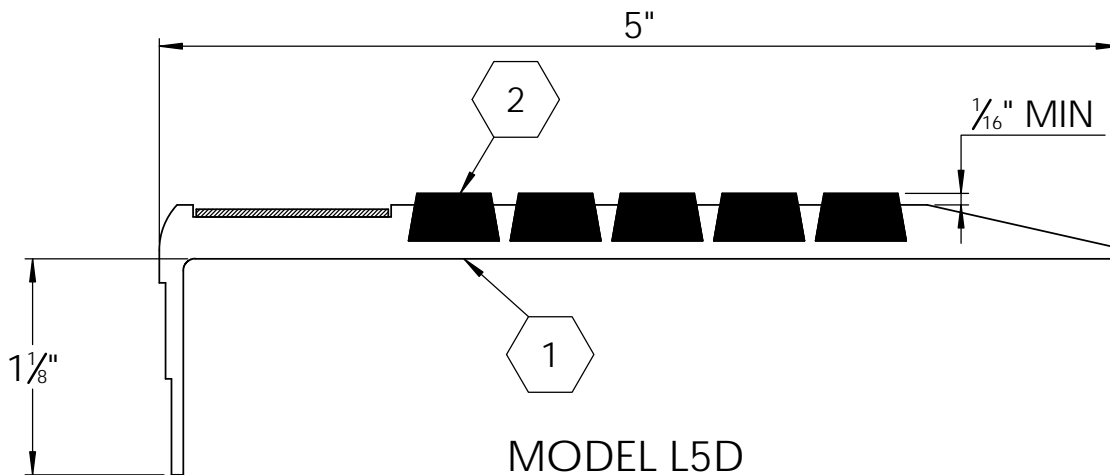

**MODEL L5D**

(RENOVATION RIBBED ABRASIVE BARS)

**SPECIFICATIONS:**

- ① **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-5
- ② **ABRASIVE:** ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE
- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF, LUMINESCENT

- 7. **LENGTH:** 12'0" MAXIMUM
- 8. COUNTER SUNK HOLES PRE-DRILLED FOR A #10 FASTENER SPACED 3" FROM ENDS AND APPROXIMATELY 12" TO 15" O.C.
- 9. UL 1994 LISTED: COMBINED WIDTH OF PHOTO-LUMINESCENT MATERIAL SHALL NOT BE LESS THAN 1"

LENGTH	QTY	COLOR

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
QTY:					
PART#:		<b>BSTRM-L5D</b>			
 9300 73rd Avenue North Brooklyn Park, MN 55428		TITLE: Stair Tread, Renovation Alum, Bar Ribbed Abrasive Long Nose, Drilled For Fastener 1" Photoluminescent Insert,			
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	DKL	9/14/21	A	Babcock STN BSTRM-L5D ShpDr	A
RELEASED	GLN	9/14/21	WEIGHT: 2 LB		SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.