


PHOTOLUMINESCENT GRIT TAPE

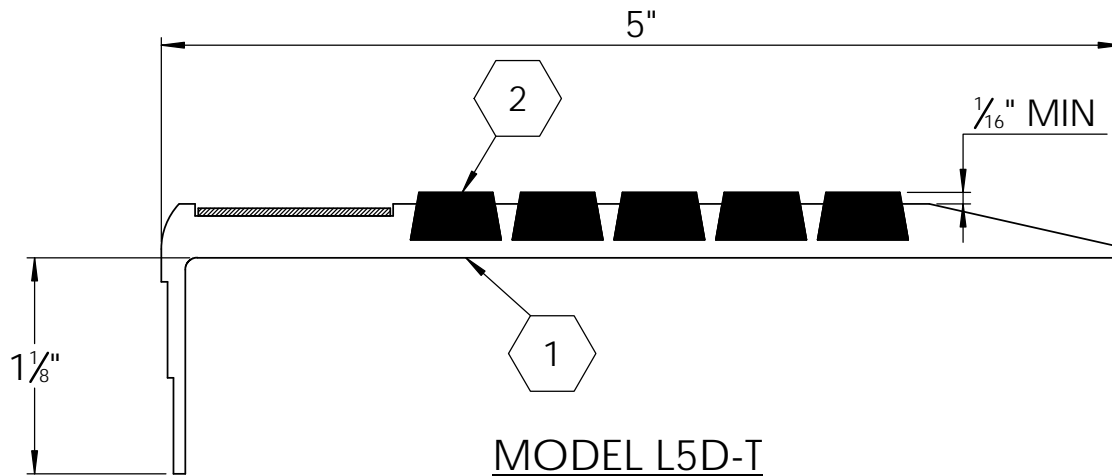

MODEL L5D-T

(RENOVATION RIBBED ABRASIVE BARS)

SPECIFICATIONS:

- ① **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-5
- ② **ABRASIVE:** ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE
- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF, LUMINESCENT
- 7. **LENGTH:** 12'0" MAXIMUM
- 8. **COUNTER SUNK HOLES PRE-DRILLED FOR A #10 FASTENER SPACED 3" FROM ENDS AND APPROXIMATELY 12" TO 15" O.C.**
- 9. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-LUMINESCENT MATERIAL SHALL NOT BE LESS THAN 1"

| LENGTH | QTY | COLOR |
|--------|-----|-------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| | | | | | |
|---|------|--|--------------|-------------------------------|-----|
| PROJECT: | | | | | |
| ARCHITECT: | | | | | |
| CONTRACTOR: | | | | | |
| QTY: | | | | | |
| PART#: | | BSTRM-L5D-T | | | |
| 9300 73rd Avenue North Brooklyn Park, MN 55428 | | TITLE: | | | |
| | | Stair Tread, Renovation Alum, Bar Ribbed Abrasive Long Nose, Drilled For Fastener 1" Photoluminescent Grit Insert | | | |
| | NAME | DATE | SIZE | DWG. NO. | REV |
| DRAWN | DKL | 9/14/21 | A | Babcock STN BSTRM-L5D-T ShpDr | A |
| RELEASED | TR | 9/14/21 | WEIGHT: 2 LB | SHEET 1 OF 1 | |

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.