ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
10	27496-44.75-Y	RAIL, 1-1/4" X 44.75L, ALUM	4
20	-	-	-
30	-	-	-
500	27180-A-Y	PKG, CORNER POST, ALUM,	4
510	-	-	-
520	27185	FTG, ELBOW,	4
530	27188	FTG, TEE,	4

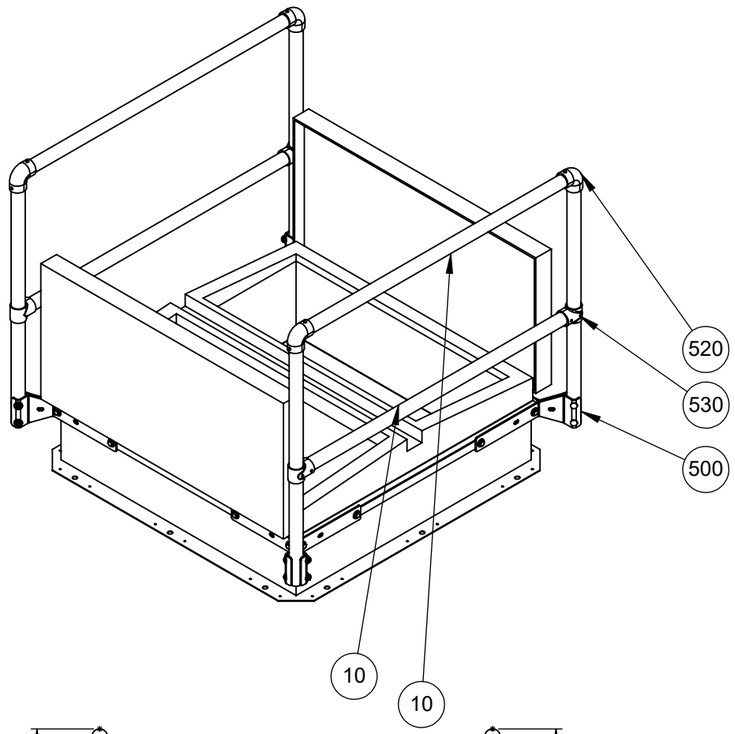

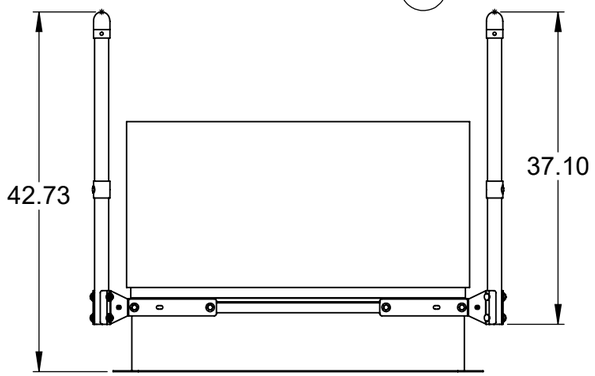

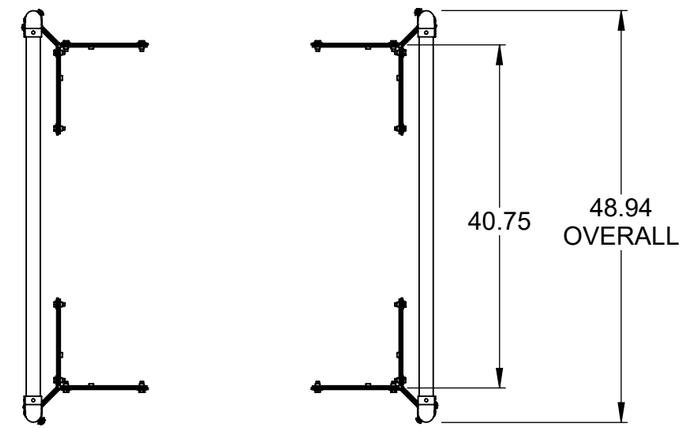

SPECIFICATIONS

RAILS, POSTS: 6061 T6 ALUMINUM ALLOY 1 1/4" I.D. SCH 40

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEELBACKING PLATE

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 36" X NA"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.28 AND 1910.29 REQUIREMENTS

FINISH: SAFETY YELLOW POWDER COAT

SRVAY36XNNTN

babcockdavis

9300 73rd Avenue North
Brooklyn Park, MN 55428

TITLE: Safety Railings for Smoke Vent 36xNA, No Exit, Aluminum, Safety Yellow Pwd

	NAME	DATE
DRAWN	DWO	9/4/2025
RELEASED	DWO	9/4/2025

SIZE B | DWG. NO. Babcock SRVAY36XNNTN | REV A

WEIGHT: 57.9 | SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.