

8 7 6 5 4

	ITEM NO.	PART NUMBER	DESCRIPTION	QUANTITY
	10	27496-4.00-Y	RAIL, 1-1/4" X 4.00L,	2
	20	27496-18.00-Y	RAIL, 1-1/4" X 18.00L,	1
	30	27496-48.50-Y	RAIL, 1-1/4" X 48.50L,	4
	500	27180-A-Y	PKG, CORNER POST, ALUM	4
	510	27185	FTG, ELBOW,	5
	515 27188 520 27186		FTG, TEE,	3
			FTG, CROSS ELBOW,	1
	525	27231	FTG, DBL TEE,	1
	575	SRCA-GATE-30	GATE. 30.	1

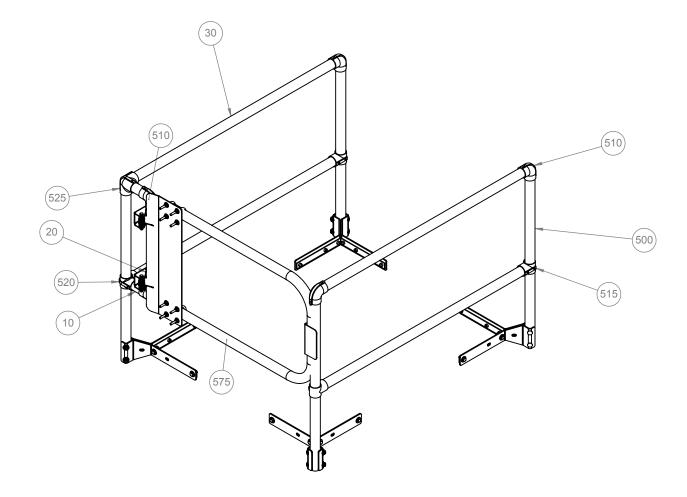

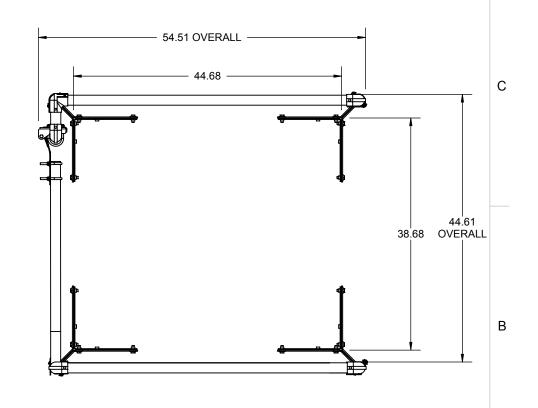

SPECIFICATIONS

RAILS, POSTS: 6061 T6 ALUMINUM ALLOY 1 1/4" I.D. SCH 40

GATE: 1 1/4" TUBULAR ALUMINUM SELF CLOSING WITH COIL SPRING, ZINC PLATED

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEEL BACKING PLATE

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 36" X 30"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.28 AND 1910.29 REQUIREMENTS FOR FALL PROTECTION; SUPPORTS 200 LBS. FORCE.

FINISH: SAFETY YELLOW POWDER COAT PAINT

SRBAY36X30FG

	babcock davis 9300 73rd Avenue North Brooklyn Park, MN 55428			Safety Railings for Roof Hatch 36X30, Front Exit, Therm-Brokn Aluminum, Safety Yellow Pwd, Self-Closing Gate, 3" Curb,			
	2.00	NAME	DATE	SIZE	DWG. NO.	·	REV
	DRAWN	SJB	TODAY	В	SRBAY36X	30FG	Α
Э.	RELEASED	DWO	1/14/2019	WEIGH	HT: Weight	SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BABCOCK-DAVIS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BABCOCK-DAVIS IS PROHIBITED.