

Security

ROOF HATCH

Designed for applications with heightened security, Babcock-Davis Security Roof Hatch is constructed of heavy-duty materials and the option for security grade locks. Ideal for prisons, banks, water treatment facilities and other high security buildings.

FEATURES

SECURITY GRADE MATERIAL Deter forced entry with extra heavy-duty top security grade roof hatches. Constructed of 3/16 inch steel or 1/4 inch aluminum.

OPTIONAL LOCKS Add essential security upgrades to your rooftop access with detention or mortise locks.

OPTIONAL VIEWPORT Gain visibility with the optional bulletproof viewport on roof hatch cover. Ideal for use in prisons and wastewater treatment facilities.



DETAILS

MATERIAL

- Aluminum: 1/4 inch, mill finish
- Steel: 3/16 inch, red oxide powder coat

COVER Formed metal cover with liner, stiffened to withstand a live load of 40psf with a max deflection of 1/150 the span

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch polystyrene in cover, 1 inch polyiso around curb

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover

SPRING Gas-spring with damper for smooth, controlled lift assistance

HINGE Stainless steel tamper-proof

HOLD OPEN ARM Zinc-plated steel automatic hold open arm with red grip handle locks cover in open position

LATCH Zinc-plated steel latch with exterior and interior turn handles and padlock hasp


FINISHES



Mill
Aluminum



Red Oxide
Powder Coat

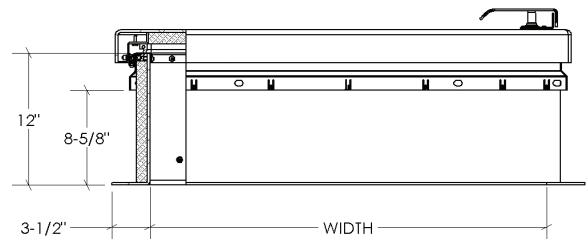

STANDARD MODELS

RED STEEL	ALUMINUM	STEEL + ALUMINUM	SIZE (IN.)	ACCESS	DOOR	CURB
BRHSG36X30S1T	BRHSA36X30S1T	BRHSB36X30S1T	36 x 30	Ladder	Single	Single Wall
BRHSG36X36S1T	BRHSA36X36S1T	BRHSB36X36S1T	36 x 36	Ladder	Single	Single Wall
BRHSG30X54S1T	BRHSA30X54S1T	BRHSB30X54S1T	30 x 54	Ship Stair	Single	Single Wall

Additional sizes and options available, call for more information.