babcockdavis®

Safety Railing

SMOKE VENT FALL PROTECTION

The OSHA compliant Safety Railing is ideal for new and retrofit applications. The safety railing mounts to the existing smoke vent curb counterflash without penetrating the membrane or curb.

Safety Yellow Powder Coat option shown

FEATURES

FALL PROTECTION In accordance with OSHA regulations, the safety railing is engineered to guard smoke vent openings to protect against falls.

EASY FIELD INSTALLATION No field cutting required as rails cut to exact size. Easy assembly fittings and quick mounting on counterflash through curb.

DETAILS

MATERIAL Rails and posts, aluminum, 1-1/4 inch ID (1.66 inch) Schedule 40 pipe

FINISH Powder Coat, Safety Yellow or Mill

FITTINGS Cast aluminum alloy with set screw hold

MOUNTING BRACKETS 3/16 inch steel, zinc plated with nut backing plate

HARDWARE Hex head bolts 3/8 inch - 16 x 3/4 inch zinc plated steel

COMPLIANCE OSHA 29 CFR 1910.28 and 1910.29

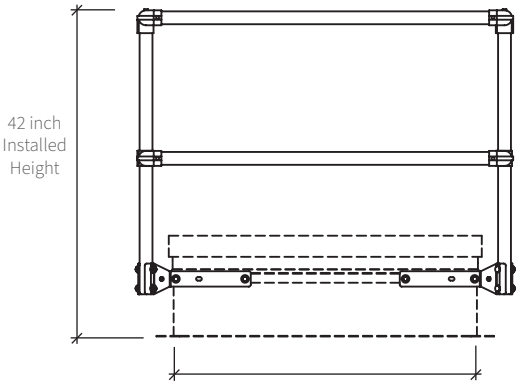

ORDER GUIDE

4-SIDED

MODEL	SIZE (IN.)
BSRVAY36X30NN	36 x 30
BSRVAY36X36NN	36 x 36
BSRVAY48X48NN	48 x48
BSRVAY48X96NN	48 x 96
BSRVAY60X96NN	60 x 96
BSRVAY60X120NN	60 x 120
BSRVAY60X144NN	60 x 144
BSRVAY72X144NN	72 x 144

2-SIDED

MODEL	SIZE (IN.)
BSRVAY48XNNTN	48
BSRVAY60XNNTN	60
BSRVAY72XNNTN	72